


**PLAN VIEW**

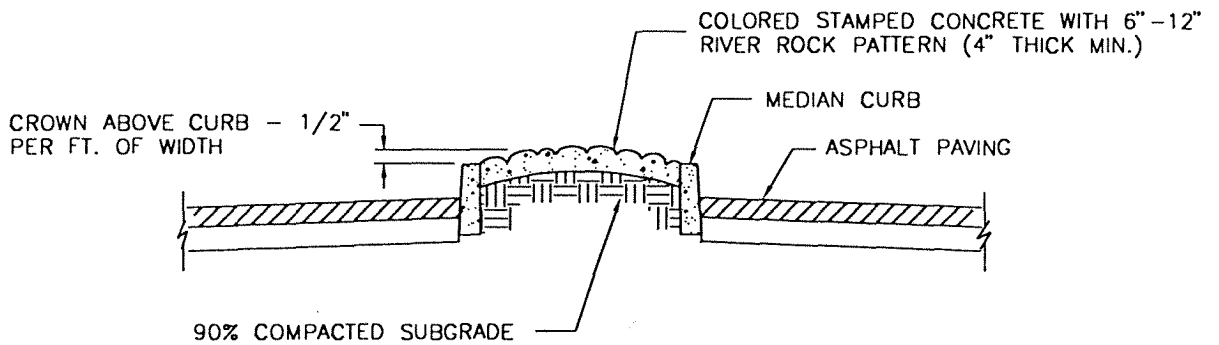

**SECTION A-A**

**NOTES:**

1. STAMPED CONCRETE SHALL BE 6'-12" RIVER ROCK PATTERN. COLOR SHALL BE PECAN TAN # A55P. STAMPED PATTERN SHALL BE FROM BOMANITE & COLORS SHALL BE FROM L. M. SCOFIELD CO. OR APPROVED EQUAL.
2. THE PATTERN IMPRINT SHALL BE 1" MIN. DEPTH.
3. THE PATTERN JOINT WIDTH (BETWEEN SIMULATED ROCKS) SHALL BE 1/4" MIN. - 1 1/4" MAX.
4. ALL JOINTS SHALL BE UNGROUTED.
5. ORIENT WEAKEN PLANE LINES ACROSS THE SHORT DIMENSION ON THE PATTERN AND AT INTERVALS NOT TO EXCEED 15'.
6. PLASTIC SHEETING SHALL BE LAID OVER CONCRETE PRIOR TO STAMPING PATTERN TO PRODUCE "LOAFED" SURFACES.
7. APPLY COLORWAX TO ALL SURFACES.

REV.	APPR. BY	DATE

REV.	APPR. BY	DATE

<p>CITY OF</p>	<b>STAMPED CONCRETE MEDIAN DETAIL</b>		STANDARD PLAN 2002
	DRAWN: STAFF	CKD.: STAFF	 APPR. Granville M. Bowman
Department of Public Works			PLATE 128
			SHEET 1 OF 1